

CrucialExams

Cisco

300-115 Exam

Cisco Implementing Cisco IP Switched Networks Exam

Thank you for Downloading 300-115 exam PDF Demo

Version: 40.0


Question: 1

DRAG DROP

Drag and drop the StackWise states from the left onto the correct descriptions on the right.

initializing	Ports have been assigned in the running configuration of the stack.
progressing	The stack master has successfully installed a configuration on a device.
provisioned	The stack master is actively performing discovery.
ready	The stack master is communicating with a new switch.
waiting	The switch is operational.

Answer:

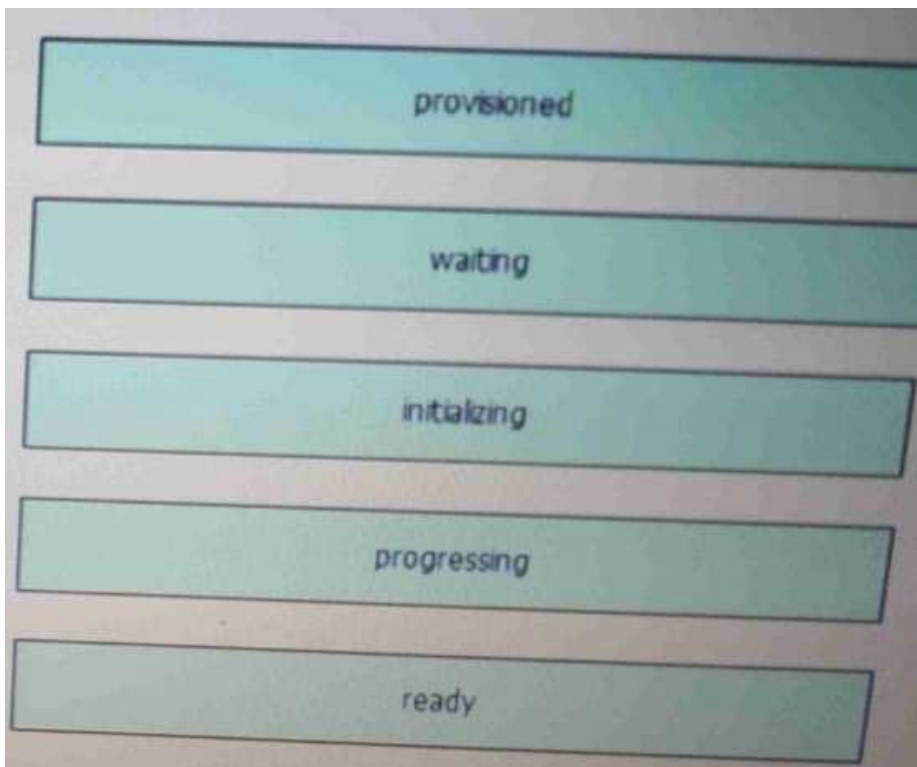

Question: 2

Which two VLAN ranges can you add, modify or delete on a switch? (Choose two)

- A. 1 through 1001
- B. 1006 through 4094
- C. 1005 through 4094
- D. 2 through 1001
- E. 2 through 4094

Answer: BD

Question: 3

Which Cisco technology provides network redundancy by combining two physically separate switches to a single logical switch?

- A. VSS
- B. IPPS
- C. PAGP
- D. LACP

Answer: A

Question: 4

Which two commands configure RSPAN to capture incoming and outgoing traffic on a single interface? (Choose two)

- A. monitor session 1 source interface gigabitethernet1/0/2 tx
- B. monitor session 1 destination remote vlan 910
- C. monitor session 1 source interface gigabitethernet1/0/1 rx
- D. monitor session 1 destination interface gigabitethernet1/0/2 rx
- E. monitor session 1 source interface gigabitethernet1/0/2 both

Answer: BE

Question: 5

Which feature is enabled automatically when you configure HSRP on an interface?

- A. ICMP redirect messages
- B. HSRP tracking
- C. IGMP snooping
- D. HSRP preemption

Answer: A


Question: 6

DRAG DROP

Drag the description from the left to add on appropriate section on right

The interface consists of a light green background. On the left, there are four yellow rectangular boxes stacked vertically, each containing a description. On the right, there is a light blue rectangular area containing two sections: 'Guard Root' and 'Guard Loop'. Each section has two empty white rectangular slots for dragging items.

Answer:

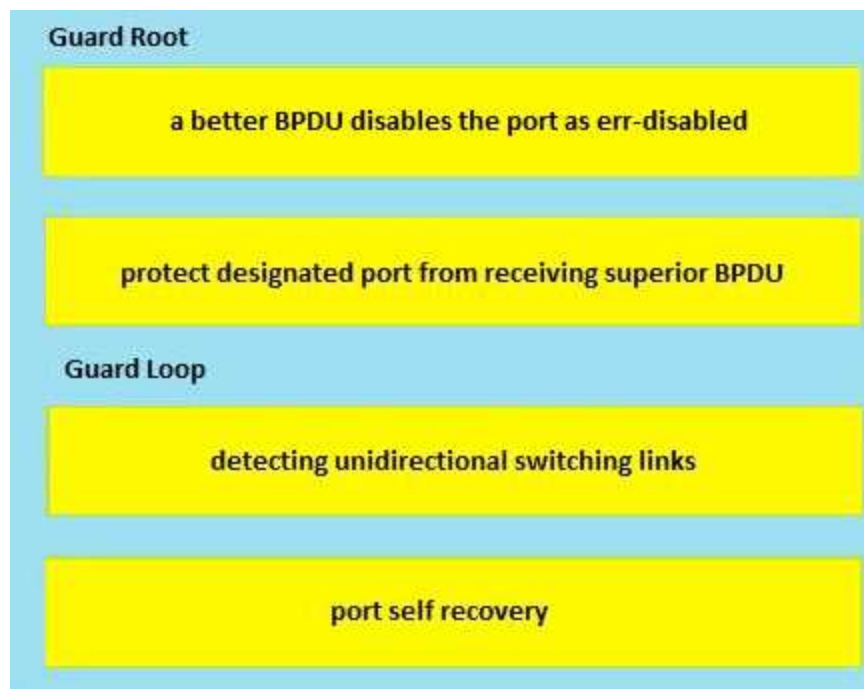

Question: 7

Which statement about configuring an RSPAN session is true?

- A. RSPAN supports, by default, the monitoring of Layer 2 switch protocols.
- B. The same RSPAN VLAN is used for a RSPAN session on all the switches.
- C. Only the source switch in a session must support RSPAN
- D. At least one access port must be configured in the RSPAN VLAN

Answer: B

Question: 8

Which command maximizes system resources for ACLs?

- A. sdm prefer default
- B. sdm prefer routing
- C. sdm prefer access
- D. sdm prefer vlan

Answer: C

Question: 9

Which option is a benefit of configuring UDLD on a link between two switches?

- A. UDLD removes switching loops.
- B. UDLD helps prevent switching loops
- C. UDLD provides a backup mechanism for fiber.
- D. UDLD determines the best switching path

Answer: B

Question: 10

Which two tasks must you perform to configure DHCP snooping on a device? (choose two)

- A. Enable DHCP snooping on the VLAN
- B. Enable VRF support for the DHCP relay agent
- C. Enable DHCP snooping globally
- D. Enable DHCP packet validation on the device.
- E. Enable DHCP option 82.

Answer: AC

Thank You for trying 300-115 PDF Demo

To BUY our 300-115 practice exam software visit link below

<https://www.crucialexams.net/300-115>

Start Your 300-115 Preparation

Use Coupon "CRUCIAL10" for extra 20% discount on the purchase of Practice Test Software. Test your 300-115 preparation with actual exam questions.